


DRAW WIRE SENSOR

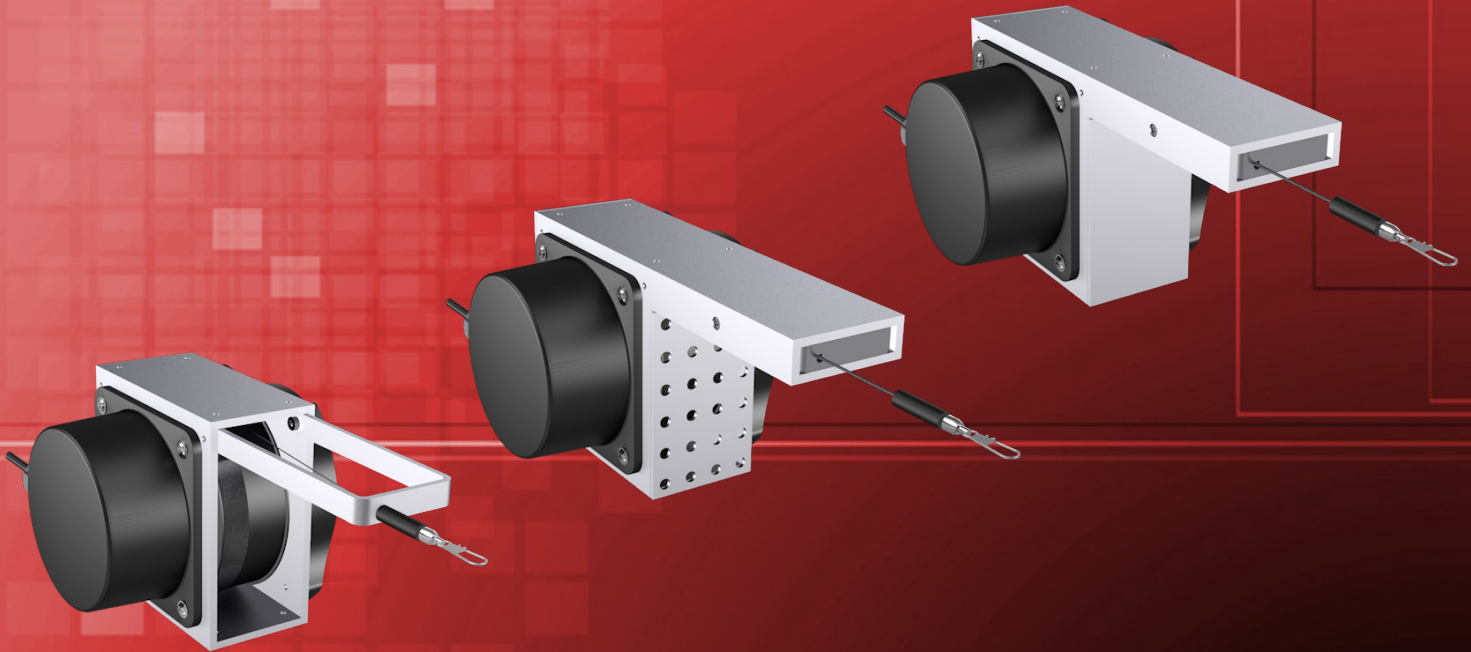

Series MH120 for mobile hydraulics applications

Key-Features:

- *Cost-effective sensor for construction machinery*
- *Measurement ranges from 3 to 10 m*
- *extreme robust construction*
- *Analog outputs: Potentiometer, 0...5 V, 0...10 V, 4...20 mA, optional redundant*
- *teachable outputs: 0...5 V, 0...10 V, with an additional Open-Collector switching output*
- *Digital output: CANopen, optional redundant*
- *Linearity up to ± 0.1 % of full scale*
- *Protection class up to IP69K (suitable for close-range high pressure, high temperature spray downs)*
- *Temperature range -20...+85 °C (optional -40 °C)*

Content:

Introduction	2
Technical data	3
Analog outputs	3
Digital output CANopen	4
Electrical connection	4
Technical drawing	5
Options	7
Accessory for teachable outputs	8
General accessories	8
Warning notices	9
Order code	..10

INTRODUCTION

The draw wire sensors of the mobile hydraulic series MH120 were specially developed for the demanding area of construction machines and construction equipment. The sensor can be individually configured depending on the application, in which it is used. Small adhesive and abrasive particles with small grain size can easily be removed when using the open MH120 versions. Seawater resistant protective grating provide a maximum protection against larger foreign objects like tree branches. In case of applications with high safety requirements, thicker stainless-steel wire ropes are available, as well as redundant, analogue outputs. This mobile hydraulics series offers the possibility the perform accurate and cost-effective distance measurement on construction machinery.

HOUSING VARIANTS

The MH120 series comprises four different types of housings.


Common to all versions:

- Aluminium housing with bore holes for the mounting
- easy rope fixation by rope clip, secured against twisting
- stainless steel wire rope

- Sensor element inside an enclosed housing
- M12 connector system or cable output
- dynamic spring drive with PA6 case


Standard: open housing + open rope bridge

Especially suited for applications under the conditions of fine dust and fluids.

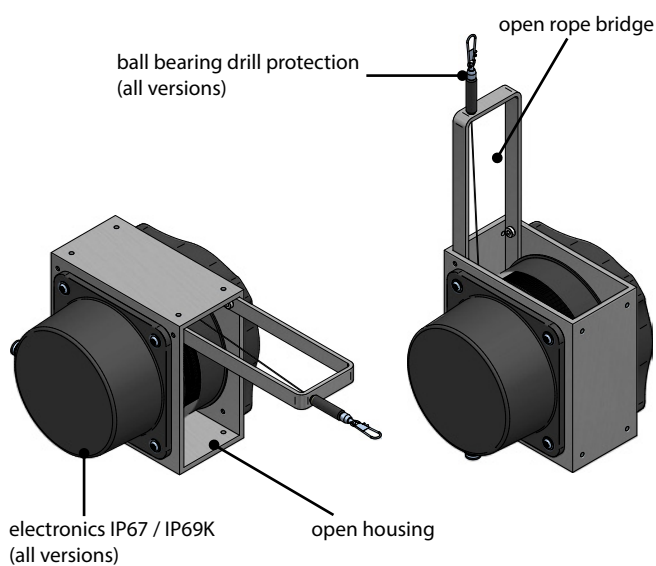


Version C1: housing with perforated plate covering + open rope bridge

Especially suited for applications under the conditions of dirt, particle size > 2 mm and fluids.

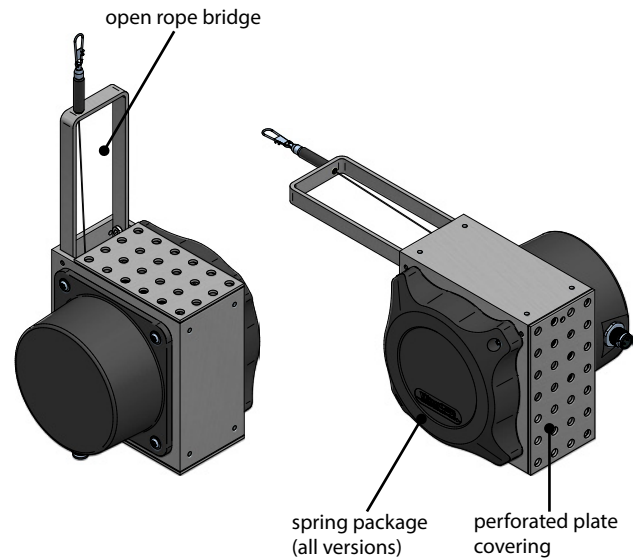


Version C2: housing with perforated plate covering + closed rope bridge

Especially suited for applications under the conditions of dirt, particle size > 2 mm and fluids, protection against impact and shock, rope cleaner (in preparation)

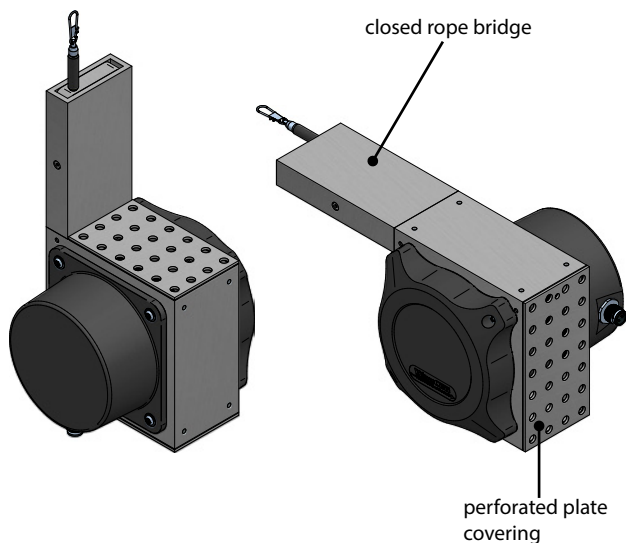

Version C3: closed housing + closed rope bridge

Especially suited for applications under the conditions of adhesive dust, cement, concrete, clay, protection against impact and shock, rope cleaner (in preparation)

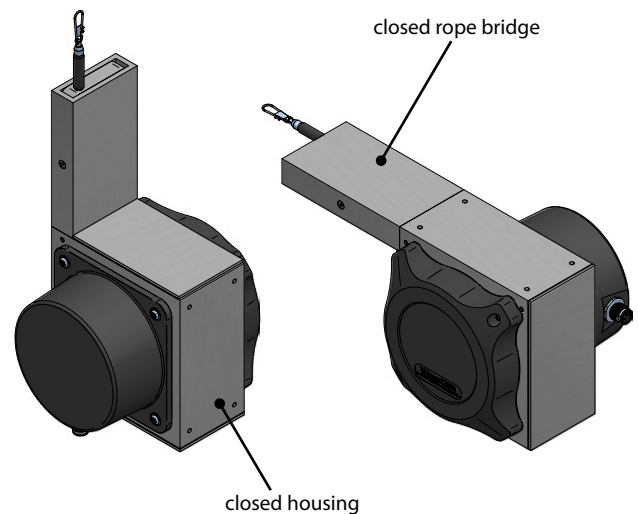

TECHNICAL DATA


Measurement range	[m]	3	4	5	6	7	8	9	10
Linearity	[%]	±0.5							
Improved linearity (optional)	[%]	±0.25 or ±0.1							
Rope diameter	[mm]	0.5 / 1 / 1.5				0.5 / 1		0.5	
Resolution		see output types							
Sensor element		potentiometer							
Output signals ¹⁾		potentiometer, 0...5 V, 0...10 V, 0...5 V (teachable), 0...10 V (teachable), 4...20 mA, CANopen							
Redundant output signals		optional for: potentiometer, 0...5 V, 0...10 V, 4...20 mA, CANopen							
Connection		connector output M12 radial or cable output radial (TPE cable, standard length 2 m)							
Protection class		IP67, optional IP69K (only in combination with cable output)							
Humidity		max. 90 % relative, no condensation							
Temperature		see output types below							
Rope extraction speed	[m/s]	max. 3							
Acceleration	[m/s ²]	max. 50							
Weight	[g]	1300 up to 1600 (depending on the measurement range)							
Housing		Aluminium, spring case PA6							
Extraction force	[N]	F _{min} = 7 / F _{max} = 13 (depending on the measurement range)							

¹⁾ other output signals on request

ANALOG OUTPUTS

	Potentiometer 1 kΩ	Voltage 0...5 V, 0...10 V	Current 4...20 mA	Voltage 0...5 V, 0...10 V (teachable)
Output	1 kΩ	0...5 V, 0...10 V, galvanically isolated, 4 conductors	4...20 mA, 2 conductors	0...5 V, 0...10 V, 3 conductors
Supply	max. 30 V	12...30 VDC		8...35 VDC
Recommended cursor current	< 1 μA	-		
Current consumption max.	-	22.5 mA (unloaded)	-	
Current consumption max.	-	-	-	150 mW
Output current	-	max. 10 mA, min. load 10 kΩ	max. 50 mA in case of error	max. 10 mA, min. load 1 kΩ
Dynamics	-	< 3 ms from 0...100 % and 100...0 %	< 1 ms from 0...100 % and 100...0 %	1 ms
Resolution	theoretically unlimited, limited by the noise			1 mV
Noise	dependent on the quality of the power supply	0.5 mV _{eff}	1.6 μA _{eff}	2 mV _{eff}
Inverse-polarity protection	-	yes		
Short-circuit proof	-	yes	-	yes
Working temperature	-20...+85 °C / optional: -40...+85 °C			
Temperature coefficient	±0.0025 %/K	0.0037 %/K	0.0079 %/K	0.0016 %/K
Electromagnetic compatibility (EMC)	-	according to EN 61326-1:2013		

Circuit

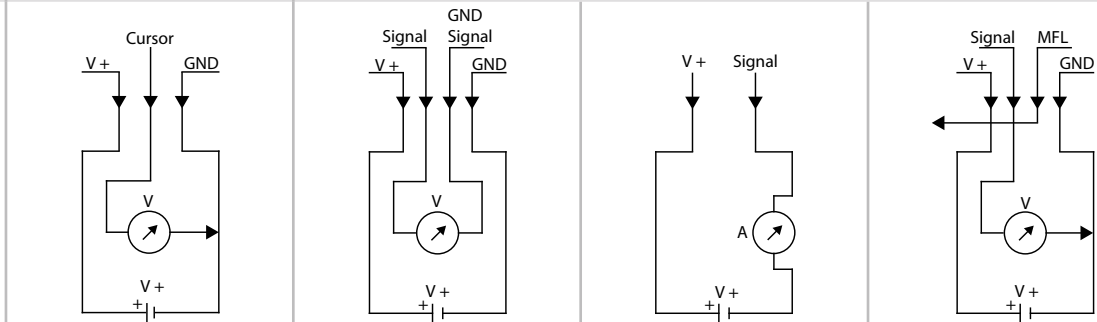

MFL = multi-functional line

DIGITAL OUTPUT CAN_{OPEN}



Link to the manual		CANopen (WCAN)
CAN specification		Full CAN 2.0B (ISO11898)
Communication profile		CANopen CiA 301 V 4.2.0
Device profile		Encoder, absolute linear; CIA 406 V 3.2.0
Error control		Producer Heartbeat, Emergency Message, Node Guarding
Node ID		Default: 7, configurable via SDO and Squeezer (offline configuration) ¹⁾
PDO		1 x TPDO, static mapping
PDO Modes		Event-triggered, Time-triggered, Sync-cyclic, Sync-acyclic
Transmission rate		1 Mbps, 800, 500, 250, 125, 50, 20 kbps configurable via SDO and Squeezer (offline configuration) ¹⁾
Bus connection		M12 connector, 5 pins
Integrated Bus termination resistor		120 Ω, connectible via SDO and Squeezer (offline configuration) ¹⁾
Bus, galvanic separation		No
Supply	[VDC]	8...30
Current consumption		10 mA typical at 24 V, 20 mA typical at 12 V
Measurement rate		1 kHz with 16-bit resolution
Repeatability	[%]	±0.5, ±0.25 or ±0.1 (according to the selected linearity)
Resolution		0.002 % of measurement range
Electrical protection		inverse polarity protection
Working temperature	[°C]	Standard: -20...+85 / optional: -40...+85
Temperature coefficient	[%/K]	0.0014
EMV		DIN EN61326-1:2013, conformity with directive 2014/30/EU

¹⁾ Offline configuration via Squeezer only in combination with M12 connector 8 pins.

For more information on the offline configuration please refer to the CANopen [manual](#).

TECHNICAL DRAWING


Standard: open housing + open rope bridge

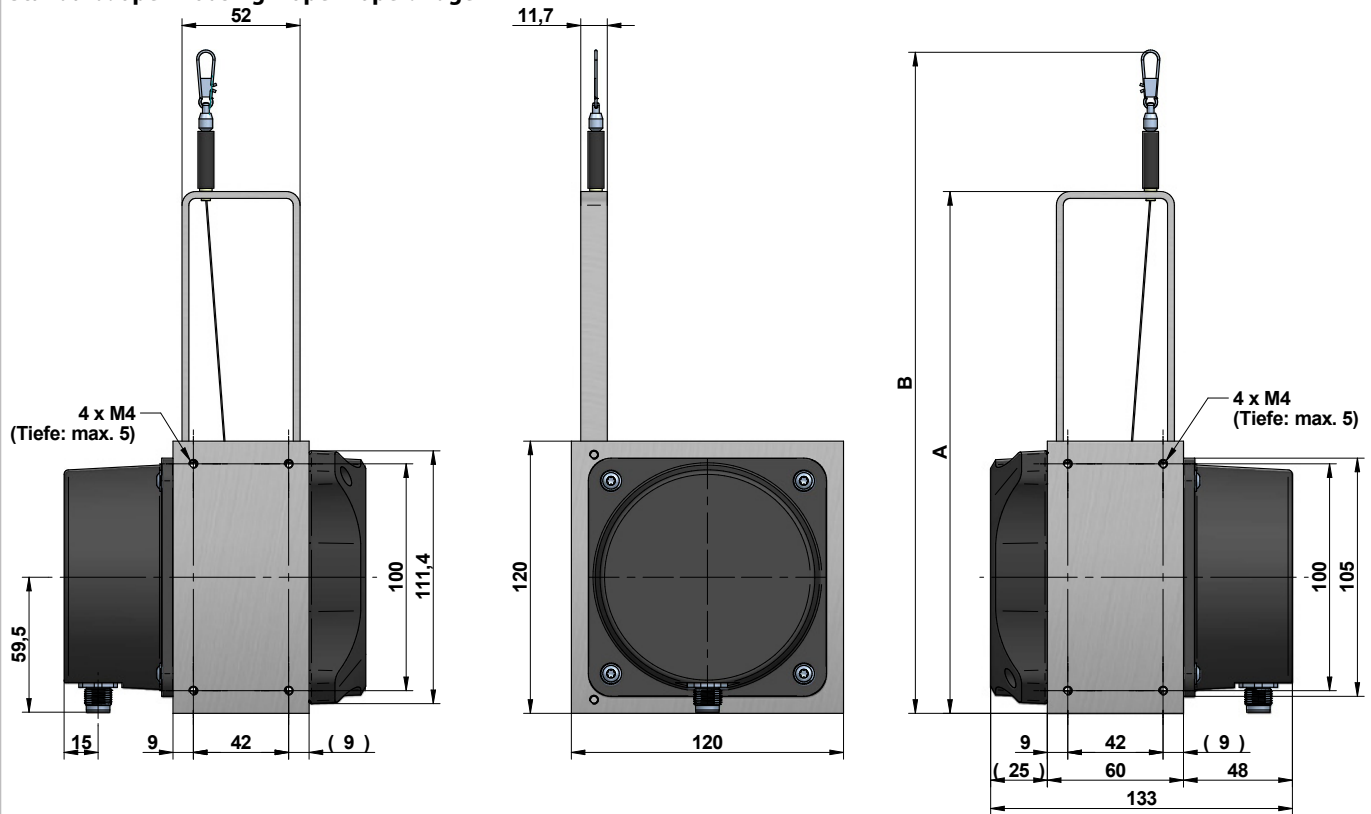

Dependency of dimensions A, B, C from the measurement range and the rope diameter

	Ø 0.5			Ø 1			Ø 1.5		
	A	B	C	A	B	C	A	B	C
3 m	230	~ 291.5	10.75	230	~ 291.5	10.75	230	~ 291.5	10.75
4 m	230	~ 291.5	10.75	230	~ 291.5	10.75	230	~ 291.5	10.75
5 m	230	~ 291.5	10.75	230	~ 291.5	10.75	320	~ 381.5	12.25
6 m	230	~ 291.5	10.75	320	~ 381.5	12.25	320	~ 381.5	12.25
7 m	230	~ 291.5	10.75	320	~ 381.5	12.25	-	-	-
8 m	230	~ 291.5	10.75	320	~ 381.5	12.25	-	-	-
9 m	230	~ 291.5	10.75	-	-	-	-	-	-
10 m	230	~ 291.5	10.75	-	-	-	-	-	-


Connector output / cable output all versions

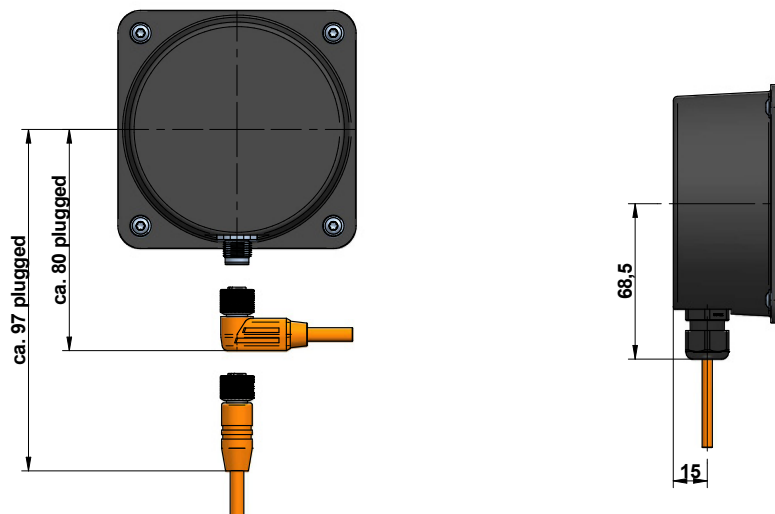


Note: when using close-range high pressure or high temperature spray downs for cleaning purposes the cable must be protected.

TECHNICAL DRAWING


Version C1: housing with perforated plate covering + open rope bridge

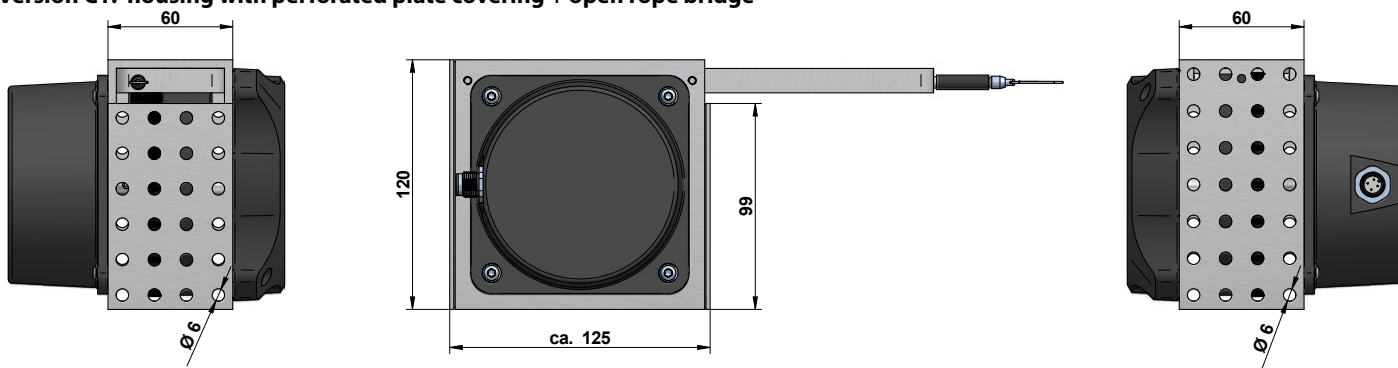

Version C2: housing with perforated plate covering + closed rope bridge

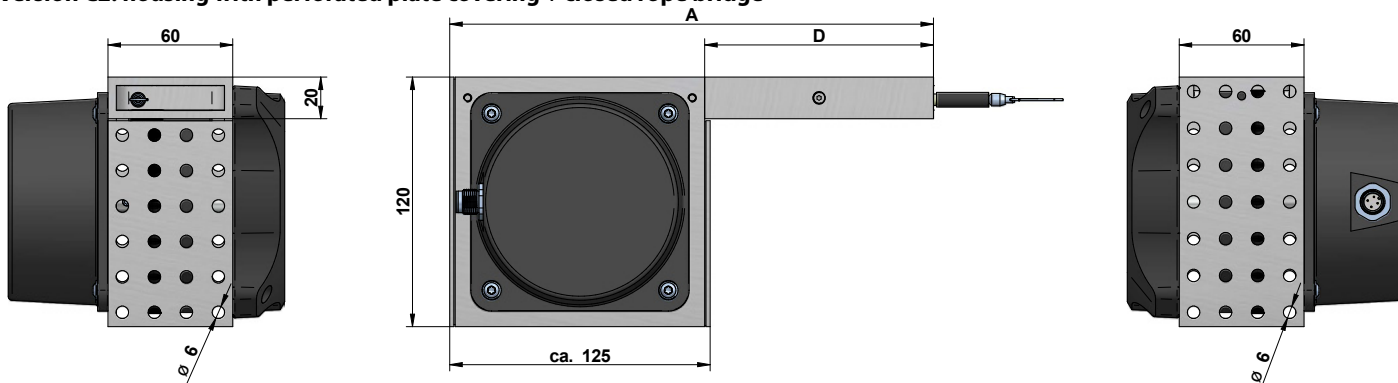


Version C3: closed housing + closed rope bridge

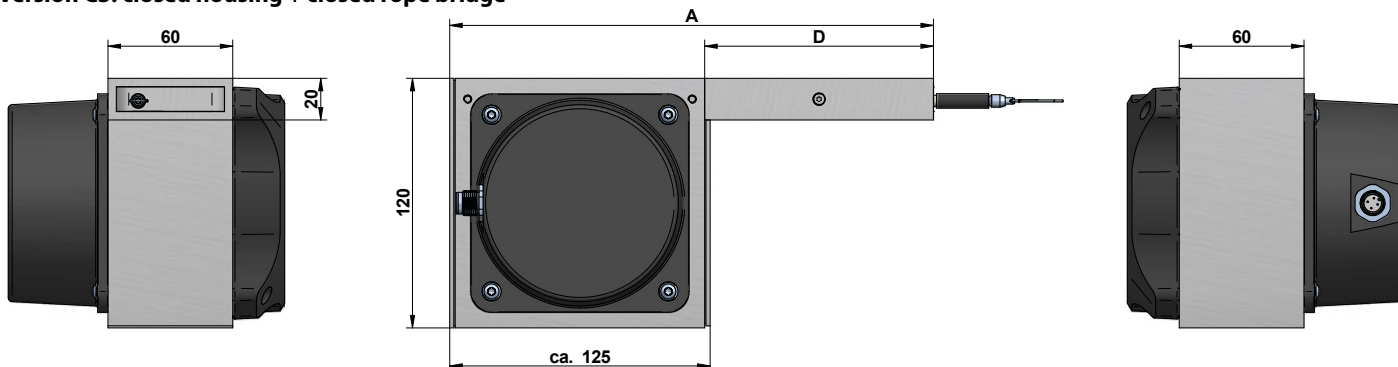






Dependency of dimensions A, B, C from the measurement range and the rope diameter

rope diameter ▼	measurement range ►	3 m	4 m	5 m	6 m	7 m	8 m	9 m	10 m
Ø 0.5	A	233							
	D	110							
Ø 1	A	233			323			-	
	D	110			200			-	
Ø 1.5	A	233		323		-			
	D	110		200		-			

Option IAP

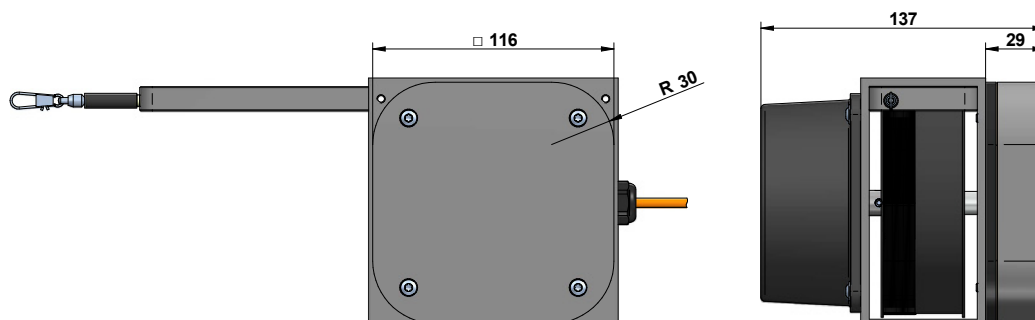

OPTIONS

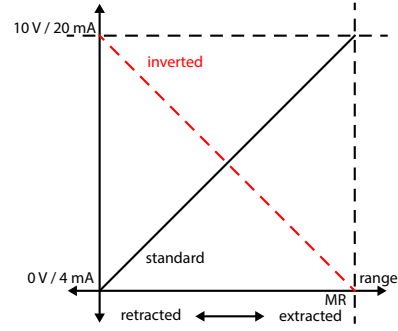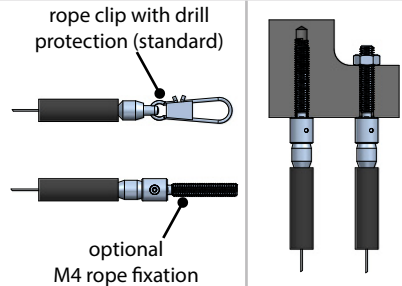
Option	Order code	Description
Changed cable or connector orientation	K1, K2, K3	Rope bridge points upwards: Standard: cable or connector output shows downwards K1: cable or connector output shows to the right K2: cable or connector output shows upwards K3: cable or connector output shows to the left 
Improved linearity	L10, L25	Improved linearity 0.1 % (L10) or 0.25 % (L25)
Inverted output signal (only analog output)	IN	The analog signal of the sensor is increasing by extracting the rope (standard). Option IN inverts the signal, i.e. the signal of the sensor declines by extracting the rope. 
Redundant output signal	R1, R2, R3, R4	By using a double potentiometer the sensor delivers two independent output signals. R1: 2 x 1 kΩ R2: 2 x 0...5 V or 2 x 0...10 V R3: 2 x 4...20 mA R4: 2 x CANopen
Sensor housing	C1, C2, C3	Standard: open housing + open rope bridge C1: housing with perforated plate covering + open rope bridge C2: housing with perforated plate covering + closed rope bridge C3: closed housing + closed rope bridge
Wire rope diameter	D05, D10, D15	The wire rope made of V4A stainless steel, 1.4401. Please choose the wire rope diameter in part two of the order code. D05: Ø 0.5 mm (standard) D10: Ø 1 mm (not available with measurement ranges 9 m and 10 m) D15: Ø 1.5 mm (not available with measurement ranges 7 m up to 10 m)
Rope fixation by M4 thread (not available with wire rope diameter 1.5 mm)	M4	Optional, pivoted rope fixation with screw thread M4, length 22 mm. Ideal for attachment to through holes or thread holes M4. 
Rope fixation with cylindrical pin and M6 through bore	ZH, ZR	ZH: cylindrical pin with M6 through bore ZR: cylindrical pin with M6 through bore and carbide ring 
Protection class IP69K (only in combination with cable output)	IP69	All relevant components are completely encapsulated. Suitable for close-range high pressure or high temperature spray downs.
Increased see water protection (Technical drawing see page 6)	IAP	The components consist of hard-anodized aluminium and V4A connecting elements. This ensures an even higher corrosion resistance, which has been especially designed for offshore use. The spring housing is sealed like the electronics housing and includes protection class IP67/IP69. The option reduces the maximal displacement speed to 1.5 m/s. 
Increased temperature range Low	T40	The use of special components allow a working temperature down to -40 °C (up to +85°C).

ACCESSORY FOR TEACHABLE OUTPUTS

Draw wire sensors with the analogue output versions 5VT and 10VT are equipped with teachable, internal electronics, called VT-Electronics. The signals provided by the sensor's potentiometer are digitized by the VT-Electronics. This digital information is first processed by the electronics, then transformed back and given out as an analogue output signal 0 to 5 V or 0 to 10 V.

The digitization offers two possibilities of adjustment, by which the sensor can be configured individually using the Squeezer:


1. Teaching of the measurement range. After a successful teaching process, the squeezer can be pulled off the sensor and be replaced by a standard cable or connector.
2. Setting an individual switching point. The squeezer allows the setting of an individual switching point open collector. The switching signal is emitted through the multi-functional line MFL.

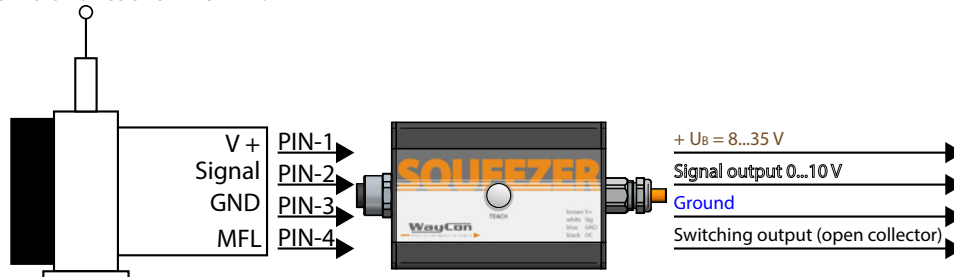

A detailed description of the functions can be found in a separate [manual](#).

Electrical connection Squeezer

Accessory:
Connection cable sensor to
Squeezer:
K4P1,5M-SB-M12

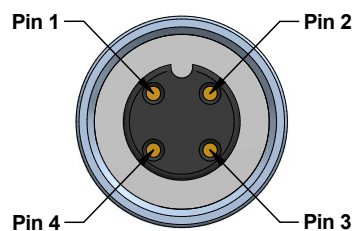

Connector (to sensor)

PIN 1	+V
PIN 2	Signal
PIN 3	GND
PIN 4	MFL*

MFL = multi-functional line

Cable ends (to PLC)

BN	+V
WH	Signal
BU	GND
BK	NPN*


* The open collector is a NPN switching output

GENERAL ACCESSORIES

Deflection pulley - UR2

The rope must be extracted from the sensor vertically. The maximum variation from the vertical is 3°. A deflection pulley allows a change in the direction of the wire rope. Several pulleys may be used. The rope clip must not be guided over the deflection pulley. Suitable for standard wire rope diameter 0.5 mm.

Material foot: anodised aluminium
Material rope wheel: POM-C
Mounting: by 2 hexagon socket or countersunk screws M6, vertical or horizontal mounting possible. Ball bearings: with special low temperature grease and RS-sealing.
Temperature: -40...+80 °C

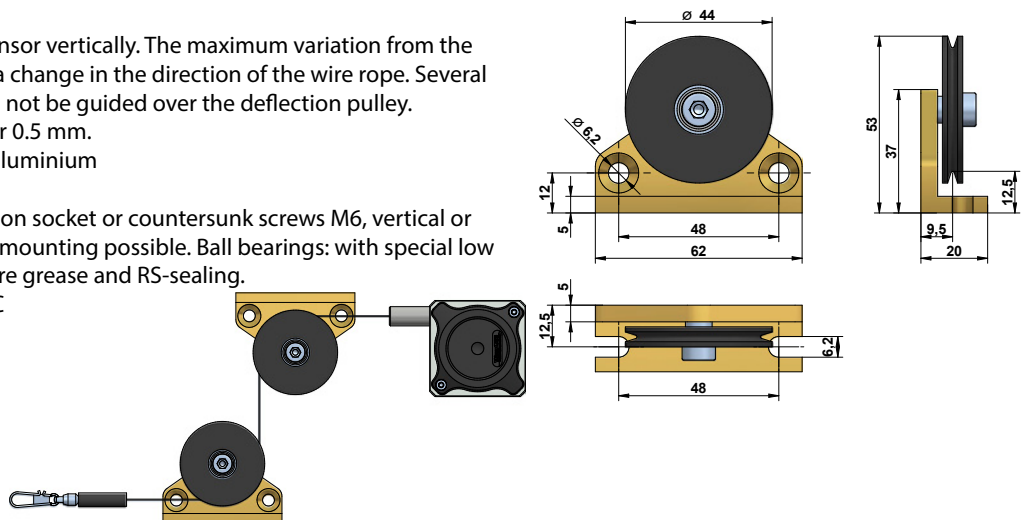


Rope extension - SV

For bridging a greater distance between the measuring target and the sensor a rope extension can be applied. The rope clip must not be guided over the deflection pulley.


Please specify the length needed in your order (XXXX). The minimum length is 150 mm:

SV1-XXXX: rope extension (150...4995 mm)
SV2-XXXX: rope extension (5000...19995 mm)
SV3-XXXX: rope extension (20000...40000 mm)



Magnetic clamp - MGG1

Use the magnetic clamp to quickly attach the rope to metallic objects without any assembly time. A rubber coating provides gentle contact (e. g. on varnished surfaces) and prevents from slipping due to vibration. The magnet consists of a neodym core for an increased adhesive force of 260 N. The hook makes it easy to attach the rope clip.

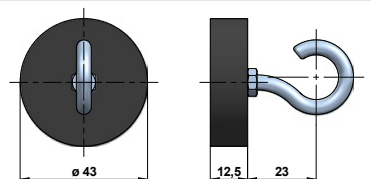


ACCESSORIES CABLES AND CONNECTORS

Single analog signal

Cable with connector M12, 4 poles, shielded

K4P2M-S-M12	2 m, connector straight
K4P5M-S-M12	5 m, connector straight
K4P10M-S-M12	10 m, connector straight
K4P2M-SW-M12	2 m, connector angular
K4P5M-SW-M12	5 m, connector angular
K4P10M-SW-M12	10 m, connector angular

PIN	1	2	3	4
Cable colour	BN	WH	BU	BK

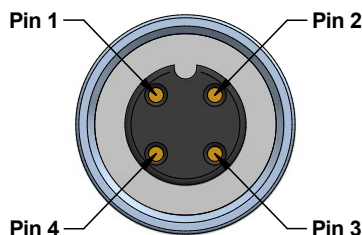

Mating connector M12, 4 poles, shielded, IP67


D4-G-M12-S	straight, M12 for self assembly
D4-W-M12-S	angular, M12 for self assembly
	cable passage: $\varnothing$ 4...8 mm
	wire cross-section: 0.14...0.75 mm ²



Digital signal CANopen

Cable with connector M12, 5 poles, shielded

K5P2M-S-M12	2 m, connector straight IP67
K5P2M-SW-M12	2 m, connector angular, IP67

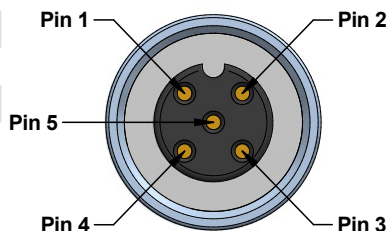


PIN	1	2	3	4	5
Cable colour	BN	WH	BU	BK	GY

Redundant analog signal and CANopen with offline configuration via Squeezer

Cable with connector M12, 8 poles, shielded

K8P2M-S-M12	2 m, connector straight
K8P5M-S-M12	5 m, connector straight
K8P10M-S-M12	10 m, connector straight
K8P2M-SW-M12	2 m, connector angular
K8P5M-SW-M12	5 m, connector angular
K8P10M-SW-M12	10 m, connector angular

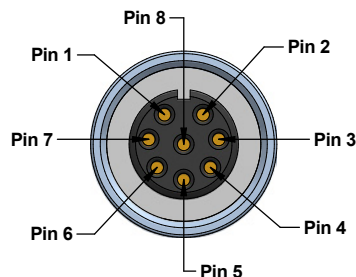

Mating connector M12, 8 poles, shielded, IP67

D8-G-M12-S	straight, M12 for self assembly
D8-W-M12-S	angular, M12 for self assembly
	cable passage: $\varnothing$ 4...8 mm
	wire cross-section: 0.14...0.34 mm ²



WARNING NOTICES

- Do not let the rope snap back. If the rope is retracted freely, this may lead to injuries (whiplash effect) and the device may be damaged.
- Caution when unhooking and retracting the rope into the sensor.
- Never exceed the specified measurement range when extracting the rope!
- Do not try to open the device. The stored energy of the spring drive may lead to injuries when being mishandled.
- Do not touch the rope when operating the sensor.
- Avoid guiding the rope over edges or corners. Use a deflection pulley instead.
- Do not operate the sensor if the rope is buckled or damaged. A ripping of the rope may lead to injuries or a damaging of the sensor.
- Only for standard version with open housing: the free turning of the rope drum **must** be ensured. In case the rope drum gets blocked there is a serious danger of injury and the sensor may get destroyed.

ORDER CODE

MH120 - - - - -

Measurement range MR [m]	
3 / 4 / 5 / 6 / 7 / 8 / 9 / 10	

Wire rope	
Diameter 0,5 mm (Standard)	D05
Diameter 1 mm (not MR 9...10)	D10
Diameter 1.5 mm (not MR 7...10)	D15

Output signal	
Potentiometer 1 kΩ	1R
Voltage 0...5 V	5V
Voltage 0...10 V	10V
Voltage 0...5 V (teachable)	5VT
Voltage 0...10 V (teachable)	10VT
Current 4...20 mA	420A
Digital CANopen	WCAN
Digital CANopen ¹⁾	WCANP

Connection	
Connector output M12 radial, 4 pole ²⁾	SR12
Cable output, radial, 2 m	KR02
Cable output, radial, 5 m	KR05
Cable output, radial, 10 m ³⁾	KR10

Version	
Standard	-
Sensor with options	O

¹⁾ offline configurable via Squeezer

²⁾ 5 pole in combination with WCAN or option R4

8 pole in combination with WCANP or options R1, R2, R3

³⁾ larger length on request

Option	Description (see page 7)
K1	cable or connector output to the right
K2	cable or connector output upwards
K3	cable or connector output to the left
L10	improved linearity ±0.1 %
L25	improved linearity ±0.25 %
IN	inverted output signal
R1	redundant output signal 1R
R2	redundant output signal 5V, 10V
R3	redundant output signal 420A
R4	redundant output signal WCAN
C1	perforated plate covering + open rope bridge
C2	perforated plate covering + closed rope bridge
C3	closed housing + closed rope bridge
M4	rope fixation M4
ZH	cylindrical pin
ZR	cylindrical pin with carbine ring
IP69	protection class IP69K
IAP	increased sea water protection, IP69K
T40	temperature range -40...+85 °C

Option	not combinable with
K1	K2, K3
K2	K1, K3
K3	K1, K2
L10	T40
L25	T40
IN	WCAN, WCANP
C1	C2, C3
C2	C1, C3
C3	C1, C2
M4	D15, ZH, ZR
ZH	M4, ZR
ZR	M4, ZH
IP69	SR12, IAP
IAP	SR12, IP69
T40	L10, L25

GENERAL ACCESSORIES

SQUEEZER2M	accessory for VT or WCANP output, 2 m cable
SQUEEZER5M	accessory for VT or WCANP output, 5 m cable
SQUEEZER10M	accsy for VT or WCANP output, 10 m cable
UR2	deflection pulley (for rope diameter 0.5 mm)

MGG1	magnetic clamp
SV1-XXXX	rope extension (150 mm up to 4995 mm)
SV2-XXXX	rope extension (5000 mm up to 19995 mm)
SV3-XXXX	rope extension (20000 mm up to 40000 mm)

ACCESSORIES CABLES AND CONNECTORS

Cable with mating connector M12, 4 poles, shielded	
K4P2M-S-M12	2 m, straight connector
K4P5M-S-M12	5 m, straight connector
K4P10M-S-M12	10 m, straight connector
K4P2M-SW-M12	2 m, angular connector
K4P5M-SW-M12	5 m, angular connector
K4P10M-SW-M12	10 m, angular connector

Mating connector M12, 4 poles, shielded	
D4-G-M12-S	straight, M12 for self assembly
D4-W-M12-S	angular, M12 for self assembly

Cable with mating connector M12, 5 poles, shielded	
K5P2M-S-M12	2 m, straight connector
K5P2M-SW-M12	2 m, angular connector

Cable with mating connector M12, 8 poles, shielded	
K8P2M-S-M12	2 m, straight connector
K8P5M-S-M12	5 m, straight connector
K8P10M-S-M12	10 m, straight connector
K8P2M-SW-M12	2 m, angular connector
K8P5M-SW-M12	5 m, angular connector
K8P10M-SW-M12	10 m, angular connector

Mating connector M12, 8 poles, shielded	
D8-G-M12-S	straight, M12 for self assembly
D8-W-M12-S	angular, M12 for self assembly

Connection cable sensor to Squeezer	
K4P1,5M-SB-M12	1.5 m, 4-pole, shielded
K48P03M-SB-M12	0.3 m, shielded, 8 poles to 4 poles ¹⁾

Adapter cable WCANP to CAN-Bus	
K58P03M-SB-M12	0.3 m, shielded, 8 poles to 5 poles

¹⁾ for redundant analog signal and CANopen with offline configuration via Squeezer (WCANP)

ACCESSORIES DISPLAYS

Digital display 2 channels, 0...10 V / 4...20 mA	
WAY-AX-S	Touchscreen, supply: 18...30 VDC
WAY-AX-S-AC	Touchscreen, supply: 115...230 VAC

More information about digital displays can be found [here](#).

Subject to change without prior notice.

WayCon Positionsmesstechnik GmbH
email: info@waycon.de
internet: www.waycon.biz

WayCon
Positionsmesstechnik

Head Office
Mehlbeerenstr. 4
82024 Taufkirchen
Tel. +49 (0)89 67 97 13-0
Fax +49 (0)89 67 97 13-250

Office Köln
Auf der Pehle 1
50321 Brühl
Tel. +49 (0)2232 56 79 44
Fax +49 (0)2232 56 79 45